



QUARTERLY GROUNDWATER MONITORING

THE SCONE WASTE LANDFILL

Noblet Road
Scone
NSW 2337

Upper Hunter Shire Council

DLH1186_H01033

April 2017

PROJECT NAME	Scone Waste Landfill Groundwater Monitoring
PROJECT ID	DLH1186
DOCUMENT CONTROL NUMBER	H01033
PREPARED FOR	Upper Hunter Shire Council
APPROVED FOR RELEASE BY	Stephen Challinor
DISCLAIMER AND COPYRIGHT	This report is subject to the copyright statement located at www.pacific-environment.com © Pacific Environment Operations Pty Ltd ABN 86 127 101 642

DOCUMENT CONTROL

VERSION	DATE	COMMENT	PREPARED BY	REVIEWED BY
H01033	12.04.2017	Final Copy	Tobias Scheid	Stephen Challinor

DLA Environmental Services Pty Ltd: ABN 80 601 661 634

BRISBANE

Level 1, 59 Melbourne Street, South Brisbane, Qld 4101
PO Box 3306, South Brisbane, Qld 4101
Ph: +61 7 3004 6400
Ph: +61 7 3004 6400

Unit 1, 22 Varley Street
Yeerongpilly, Qld 4105
Ph: +61 7 3004 6460

ADELAIDE

35 Edward Street, Norwood SA 5067
PO Box 3187, Norwood, SA 5067
Ph: +61 8 8332 0960
Fax: +61 7 3844 5858

PERTH

Level 1, Suite 3
34 Queen Street, Perth, WA 6000
Ph: +61 8 9481 4961
Fax: +61 2 9870 0999

SYDNEY

Suite 1, Level 1, 146 Arthur Street
North Sydney, NSW 2060
Ph: +61 2 9870 0900
Fax: +61 2 9870 0999

DLA ENVIRONMENTAL SERVICES

Unit 3, 38 Leighton Place
Hornsby, NSW 2077
Ph: +61 2 9476 1765
Fax: +61 2 9476 1557

MELBOURNE

Level 10, 224 Queen Street
Melbourne, Vic 3000
Ph: +61 3 9036 2637
Fax: +61 2 9870 0999

HUNTER

42b Church Street, Maitland NSW 2320
Ph: +61 2 49330001
Email: hunter@dlaenvironmental.com.au

DISCLAIMER

DLA Environmental Services (DLA) acts in all professional matters as a faithful advisor to the Client and exercises all reasonable skill and care in the provision of its professional services. Reports are commissioned by and prepared for the exclusive use of the Client. They are subject to and issued in accordance with the agreement between the Client and DLA. DLA is not responsible for any liability and accepts no responsibility whatsoever arising from the misapplication or misinterpretation by third parties of the contents of its reports.

Except where expressly stated, DLA does not attempt to verify the accuracy, validity or comprehensiveness of any information supplied to DLA for its reports. Reports cannot be copied or reproduced in whole or part for any purpose without the prior written agreement of DLA.

Where site inspections, testing or fieldwork have taken place, the report is based on the information made available by the client or their nominees during the visit, visual observations and any subsequent discussions with regulatory authorities. The validity and comprehensiveness of supplied information has not been independently verified and, for the purposes of this report, it is assumed that the information provided to DLA is both complete and accurate. It is further assumed that normal activities were being undertaken at the site on the day of the site visit(s), unless explicitly stated otherwise.

ABBREVIATIONS

ACM	Asbestos Containing Material
AHD	Australian Height Datum
ANZECC	Australian and New Zealand Environment and Conservation Council
AST	Above-ground Storage Tank
ASS	Acid Sulfate Soil
B(a)P	Benzo(a)Pyrene
BGL	Below Ground Level
BH	Borehole
BTEX	Benzene, Toluene, Ethyl Benzene, Xylene
COC	Chain of Custody documentation
CLM	Contaminated Land Management
DA	Development Application
DEC	Department of Environment and Conservation (NSW)
DECC	Department of Environment and Climate Change (NSW)
DECCW	Department of Environment, Climate Change and Water (NSW)
DLA	DLA Environmental Services
DP	Deposited Plan
DQO	Data Quality Objective
EC	Electrical Conductivity
EIL	Ecological Investigation Level
EMP	Environmental Management Plan
EPA	Environment Protection Authority (NSW)
ESL	Ecological Screening Level
HIL	Health-Based Investigation Level
LOR	Limit of Reporting
MW	Monitoring Well
NATA	National Association of Testing Authorities, Australia
NEPC	National Environment Protection Council
NEPM	National Environment Protection Measure
NHMRC	National Health and Medical Research Council
NRMMC	Natural Resource Management Ministerial Council
NSW	New South Wales
OCP	Organochlorine Pesticides
OEH	Office of Environmental and Heritage
OPP	Organophosphorus Pesticides
OH&S	Occupational Health and Safety
PAH	Polycyclic Aromatic Hydrocarbons
PCB	Polychlorinated Biphenyls
PID	Photo-Ionisation Detector
PQL	Practical Quantification Limit
QA/QC	Quality Assurance and Quality Control
RAP	Remedial Action Plan
RPD	Relative Percentage Difference
SAC	Site Acceptance Criteria
SAQP	Sampling Analysis and Quality Plan
SEPP	State Environmental Planning Policy
SWL	Standing Water Level
TCLP	Toxicity Characteristic Leaching Procedure
TRH	Total Recoverable Hydrocarbons
UCL	Upper Confidence Limit
UST	Underground Storage Tank
VOC	Volatile Organic Compounds
WHS	Work Health Safety

TABLE OF CONTENTS

1.0	INTRODUCTION	1
1.1	General.....	1
1.2	Scope of Works	1
2.0	MONITORING PARAMETERS.....	2
3.0	SAMPLING METHODOLOGY.....	4
3.1	Groundwater Sampling.....	4
4.0	RESULTS	6
5.0	DISCUSSION.....	11
6.0	CONCLUSIONS	13
7.0	REFERENCES	14

FIGURES

Figure 1	Site location regional
Figure 2	Site location local
Figure 3	Site layout with sample locations

ATTACHMENTS

Attachment 1	NATA certified analytical results
Attachment 2	YSI water quality meter calibration certificate
Attachment 3	Data log
Attachment 4	Groundwater Field Data Sheets

1.0 INTRODUCTION

1.1 General

DLA Environmental Services (DLA) was engaged by Upper Hunter Shire Council (the Client) to conduct annual and quarterly surface and groundwater monitoring of the following area:

Scone Waste Facility Area
Noblet Road, Scone NSW 2337 (the Site).

The Groundwater Monitoring Report provides an overview of the current condition of groundwater at the Site in relation to the Site Criteria and satisfies the groundwater monitoring requirements of the EPA Environmental Protection Licence 5863.

The report has been prepared utilising information obtained as part of the investigation process, from previous monitoring reports and from experience, knowledge, and current industry practice in the monitoring of similar sites. It is anticipated that quarterly monitoring will be undertaken in April, July and October with annual reporting undertaken in the January reporting period.

Quarterly groundwater monitoring was undertaken on 6th April 2017 by staff of DLA.

1.2 Scope of Works

The scope of work provided by Upper Hunter Shire Council indicates that annual and quarterly groundwater monitoring is required at the following groundwater sampling locations:

- MWA
- MWB
- MWC
- MWD (landfill leachate monitoring well): and,
- MWE

Refer to **Figure 3: Site Layout with Sample Locations**

2.0 MONITORING PARAMETERS

The following sample analysis parameters and monitoring frequency were provided by Upper Hunter Shire Council for the Groundwater Wells. Threshold Criteria are primarily sourced from Australian and New Zealand guidelines for fresh and marine water quality (ANZECC) 2000 95% trigger values and National Environment Protection (Assessment of Site Contamination) Measure (NEPM) 2013.

Table 2a: Analytes, Threshold Criteria and Monitoring Frequency for Groundwater Monitoring Wells

Analytes	Units	Threshold Criteria	
		NEPM 2013 and ANZECC 2000 Fresh Water 95%	Monitoring Frequency
Calcium	mg/L	NA	Quarterly
Alkalinity (total)	mg/L	NA	Quarterly
Chloride	mg/L	NA	Quarterly
Fluoride	mg/L	NA	Quarterly
Iron	mg/L	0.3 ^E	Quarterly
Magnesium	mg/L	NA	Quarterly
Manganese	mg/L	1.9 ^D	Quarterly
Organochlorine pesticides	mg/L	0.00001 ^F	Quarterly
Potassium	mg/L	410 ^Q	Quarterly
pH	pH	6.5 – 8	Quarterly
Sodium	mg/L	NA	Quarterly
Ammonia	mg/L	0.9 ^D	Quarterly
Nitrate	mg/L	0.7	Quarterly
Sulfate	mg/L	NA	Quarterly
Total organic carbon	mg/L	4	Quarterly
Total phenolics	mg/L	0.32	Quarterly
Electrical conductivity (EC)	µS/cm	NA	Quarterly
Total dissolved solids	mg/L	NA	Yearly
Biochemical Oxygen	mg/L	NA	Yearly
Phosphate	mg/L	0.015 ^G	Yearly
Arsenic III & V	mg/L	0.024 (III), 0.013 (V)	Yearly
Aluminium	mg/L	0.055 (pH> 6.5)	Yearly
Barium	mg/L	NA	Yearly
Cadmium	mg/L	0.0002	Yearly
Cobalt	mg/L	0.09 ^M	Yearly
Copper	mg/L	0.0014	Yearly
Chromium VI	mg/L	0.001 ^D	Yearly

**Table 1: Analytes, Threshold Criteria and Monitoring Frequency for Groundwater Monitoring Wells
(cont...)**

Sampling Parameter	Units	Threshold Criteria	
		NEPM 2013 and ANZECC 2000 Fresh Water	Monitoring Frequency
Chromium (total)	mg/L	0.001	Yearly
Lead	mg/L	0.0034	Yearly
Mercury	mg/L	0.0006	Yearly
Zinc	mg/L	0.008 ^D	Yearly
TPH	mg/L	0.6 ^I	Yearly
Benzene	mg/L	0.95	Yearly
Toluene	mg/L	0.18 ^L	Yearly
Ethylbenzene	mg/L	0.08 ^L	Yearly
CVCs/VOCCs:			
- Total	mg/L	NA	Yearly
- Tetrachlorethene (TCE)	mg/L	NA	Yearly
- 1,1,1-Trichloroethane (TCA)	mg/L	6500 (1,1,2 TCA)	Yearly
- Tetrachloroethene (PCE)	mg/L	0.05 ^N	Yearly
- 1,2-Dichloroethene	mg/L	0.03 ^P	Yearly
Vinyl Chloride	mg/L	0.0003 ^N	Yearly
PCBs	mg/L	0.00003 ^A	Yearly
PAHs	mg/L	0.016 ^B	Yearly
OPPs	mg/L	0.00002 ^C	Yearly

- A - Trigger value for Aroclor 1254 used in absence of trigger value for total PCBs
- B - Trigger value for Naphthalene used in absence of reliable trigger value for total PAHs
- C - Trigger value of Azinphos methyl used in absence of reliable trigger value for total OPP
- D – Trigger value may not protect key species from chronic toxicity, refer to ANZECC & ARMCANZ (2000) for further guidance
- E - Interim working level, in absence of reliable trigger value
- F - Trigger value for DDT used in absence of trigger value for total OCP
- G - Filterable Reactive Phosphate
- I - Dutch Intervention (2000) Mineral Oil Criteria
- L – ANZECC 2000 Low reliability trigger value
- M – ANZECC 2000 Moderate reliability trigger value
- N - NEPM 2013 drinking water criteria
- P - Australian Drinking Water Guidelines 2011
- Q – Poor (acceptable) drinking water criteria, World Health Organisation Guidelines for Drinking-water Quality 2009

3.0 SAMPLING METHODOLOGY

3.1 Groundwater Sampling

Groundwater samples were collected from five well locations. Purging and sampling of monitoring wells was conducted in accordance with the NEPM (NEPC, 2013), the *Guidelines for the Assessment and Management of Groundwater Contamination* (NSW DEC, 2007) and the *Murray-Darling Basin Groundwater Quality Sampling Guidelines*.

Wells were purged with a low flow peristaltic pump or disposable bailer whilst being measured for physiochemical stability to indicate the flow of formation water. Physiochemical properties were measured at regular intervals following the purging of each equipment volume using a YSI Pro DSS Water Quality Meter and a flow through cell. Stable conditions were indicated by monitoring the following parameters for three consecutive readings of:

- PH \pm 0.1 unit;
- EC \pm 5%;
- Temp \pm 0.20;
- Redox \pm 10%; and,
- Dissolved Oxygen \pm 10%.

Samples were obtained using a low-flow peristaltic pump with disposable Low Density Polyethylene Tubing (LDPE) tubing / samples were obtained using a disposable bailer.

Groundwater samples were collected into laboratory prepared sample containers for specific analytes, i.e. into a combination of plastic unpreserved, plastic preserved, glass amber unpreserved and preserved glass vials. All samples were collected and filled into the respective sample containers so no head space remained in the sample container, with no loss of any preservation agents, where present. Groundwater samples for metals were lab filtered prior to testing. All samples were then placed immediately into a chilled esky to prevent the loss of potential volatile components.

Decontamination procedures between sampling events and sampling locations are outlined below.

Sampling equipment was cleaned prior to sampling and between sample locations to prevent cross contamination. The cleaning procedure included:

- Washing and brush scrub with phosphate free laboratory grade detergent;
- Rinsing with water of a potable quality;
- Rinsing with deionised water; and,

- Disposable Teflon tubing was used with the low flow pump and was replaced between sample locations (Groundwater Sampling Only).

It is opinion of DLA that decontamination procedures were appropriate during groundwater sampling and that no cross contamination can be inferred.

4.0 RESULTS

All wells were sampled during the October 2016 sampling event, results are detailed below.

Refer to **Table 4a – Table 4e** for *results*. Refer to **Figure 3** for *sampling locations*.

Table 4a – Groundwater Results Comparison April 2017

Sampling Parameter	Units	Threshold Criteria (mg/L)	MWA July 2016	MWA Oct 2016	MWA Jan 2017	MWA Apr 2017
Calcium	mg/L	NA	620	580	600	570
Alkalinity (total)	mg/L	NA	460	430	460	450
Chloride	mg/L	NA	7900	7400	8200	7700
Fluoride	mg/L	NA	0.12	0.15	ND	0.14
Iron	mg/L	0.3 ^E	0.021	ND	ND	ND
Magnesium	mg/L	NA	1200	1100	1200	1100
Manganese	mg/L	1.9 ^D	0.021	0.02	0.004	0.006
OCP	mg/L	0.00001 ^F	ND	ND	ND	ND
Potassium	mg/L	410 ^Q	3.7	4.4	5.6	3.1
pH	pH	6.5 – 8	7.1	6.8	7.3	6.8
Sodium	mg/L	NA	2200	2100	2100	2200
Ammonia	mg/L	0.9 ^D	0.14	0.14	0.13	0.14
Nitrate	mg/L	0.7	0.36	0.50	0.13	0.24
Sulfate	mg/L	NA	35	37	38	39
Total Organic Carbon (TOC)	mg/L	4	6.1	6.2	3.9	6.4
Total phenolics	mg/L	0.32	0.03	0.22	0.02	0.16
EC	µS/cm	NA	21000	21000	19000	21000

Samples highlighted in **Bold** exceed threshold criteria

ND = No Detection above Laboratory LOR

D – Trigger value may not protect key species from chronic toxicity, refer to ANZECC & ARMCANZ (2000) for further guidance

E - Interim working level, in absence of reliable trigger value

F - Trigger value for DDT used in absence of trigger value for total OCP

Q – Poor (acceptable) drinking water criteria, World Health Organisation Guidelines for Drinking-water Quality 2009

NA – Not Applicable

Table 4b – Groundwater Results Comparison April 2017

Sampling Parameter	Units	Threshold Criteria (mg/L)	MWB	MWB	MWB	MWB
			July 2016	Oct 2016	Jan 2017	Apr 2017
Calcium	mg/L	NA	650	600	590	580
Alkalinity (total)	mg/L	NA	390	360	380	360
Chloride	mg/L	NA	6100	6000	6300	6000
Fluoride	mg/L	NA	0.24	0.22	ND	0.27
Iron	mg/L	0.3 ^E	0.008	0.006	ND	ND
Magnesium	mg/L	NA	820	830	850	760
Manganese	mg/L	1.9 ^D	0.008	0.008	ND	0.009
OCP	mg/L	0.00001 ^F	ND	ND	ND	ND
Potassium	mg/L	410 ^Q	3.1	3.6	5	2.8
pH	pH	6.5 – 8	7.1	6.9	7.2	6.6
Sodium	mg/L	NA	1700	1800	1700	1700
Ammonia	mg/L	0.9 ^D	0.10	0.09	0.10	0.09
Nitrate	mg/L	0.7	0.95	1.1	0.59	0.71
Sulfate	mg/L	NA	69	69	70	77
Total Organic Carbon (TOC)	mg/L	4	7.6	6.6	5	6.8
Total phenolics	mg/L	0.32	ND	0.14	0.04	0.02
EC	µS/c	NA	16000	17000	16000	17000

Samples highlighted in **Bold** exceed threshold criteria

ND = No Detection above Laboratory LOR

D – Trigger value may not protect key species from chronic toxicity, refer to ANZECC & ARMCANZ (2000) for further guidance

E - Interim working level, in absence of reliable trigger value

F - Trigger value for DDT used in absence of trigger value for total OCP

Q – Poor (acceptable) drinking water criteria, World Health Organisation Guidelines for Drinking-water Quality 2009

NA – Not Applicable

Table 4c – Groundwater Results Comparison April 2017

Sampling Parameter	Units	Threshold Criteria (mg/L)	MWC	MWC	MWC	MWC
			July 2016	Oct 2016	Jan 2017	April 2017
Calcium	mg/L	NA	55	67	44	34
Alkalinity (total)	mg/L	NA	730	630	830	670
Chloride	mg/L	NA	610	770	880	520
Fluoride	mg/L	NA	0.24	0.34	0.13	0.44
Iron	mg/L	0.3 ^E	0.006	ND	ND	ND
Magnesium	mg/L	NA	93	120	89	68
Manganese	mg/L	1.9 ^D	5.4	5.6	7.8	7.3
OCP	mg/L	0.00001 ^F	ND	ND	ND	ND
Potassium	mg/L	410 ^Q	1.0	1.1	2	0.9
pH	pH	6.5 – 8	7.4	7.1	7.6	7.1
Sodium	mg/L	NA	580	620	510	540
Ammonia	mg/L	0.9 ^D	0.05	0.04	0.12	0.06
Nitrate	mg/L	0.7	0.15	ND	ND	ND
Sulfate	mg/L	NA	220	180	200	120
Total Organic Carbon (TOC)	mg/L	4	24	24	21	23
Total phenolics	mg/L	0.32	ND	ND	ND	ND
EC	µS/c	NA	3300	3900	4200	2900

Samples highlighted in **Bold** exceed threshold criteria

ND = No Detection above Laboratory LOR

D – Trigger value may not protect key species from chronic toxicity, refer to ANZECC & ARMCANZ (2000) for further guidance

E - Interim working level, in absence of reliable trigger value

F - Trigger value for DDT used in absence of trigger value for total OCP

Q – Poor (acceptable) drinking water criteria, World Health Organisation Guidelines for Drinking-water Quality 2009

NA – Not Applicable

Table 4d – Groundwater Results Comparison April 2017

Sampling Parameter	Units	Threshold	MWD	MWD	MWD	MWD
		Criteria (mg/L)	(leachate) July 2016	(leachate) Oct 2016	(leachate) Jan 2017	(leachate) April 2017
Calcium	mg/L	NA	250	210	260	260
Alkalinity (total)	mg/L	NA	1200	1600	2300	1500
Chloride	mg/L	NA	1000	1600	2800	2200
Fluoride	mg/L	NA	0.14	0.27	ND	0.28
Iron	mg/L	0.3 ^E	0.52	1.2	1.1	0.920
Magnesium	mg/L	NA	120	150	230	190
Manganese	mg/L	1.9 ^D	0.960	0.6	0.850	0.780
OCP	mg/L	0.00001 ^F	ND	ND	ND	ND
Potassium	mg/L	410 ^Q	120	140	210	130
pH	pH	6.5 – 8	7.3	7.3	7.5	7.3
Sodium	mg/L	NA	630	1000	1400	1200
Ammonia	mg/L	0.9 ^D	80	150	250	210
Nitrate	mg/L	0.7	ND	ND	ND	ND
Sulfate	mg/L	NA	140	110	330	310
Total Organic Carbon (TOC)	mg/L	4	140	200	270	150
Total phenolics	mg/L	0.32	0.01	0.07	0.04	0.19
EC	µS/c	NA	5200	7800	11000	9400

Samples highlighted in **Bold** exceed threshold criteria

ND = No Detection above Laboratory LOR

D – Trigger value may not protect key species from chronic toxicity, refer to ANZECC & ARMCANZ (2000) for further guidance

E - Interim working level, in absence of reliable trigger value

F - Trigger value for DDT used in absence of trigger value for total OCP

Q – Poor (acceptable) drinking water criteria, World Health Organisation Guidelines for Drinking-water Quality 2009

NA – Not Applicable

As MWD is within the perched landfill leachate water table, the Threshold Criteria are only applicable as indicators of general water quality for comparison to the wells surrounding the landfill. Exceedances of the Threshold Criteria for MWD are expected and do not indicate contamination is leaving the site.

Table 4e – Groundwater Results Comparison April 2017

Sampling Parameter	Units	Threshold Criteria (mg/L)	MWE	MWE	MWE	MWE
			July 2016	Oct 2016	Jan 2017	April 2017
Calcium	mg/L	NA	57	61	70	34
Alkalinity (total)	mg/L	NA	970	900	1100	1100
Chloride	mg/L	NA	470	560	580	360
Fluoride	mg/L	NA	0.30	0.41	0.18	0.52
Iron	mg/L	0.3 ^E	0.021	0.012	0.021	0.006
Magnesium	mg/L	NA	66	67	76	67
Manganese	mg/L	1.9 ^D	0.43	0.110	0.27	7.3
OCP	mg/L	0.00001 ^F	ND	ND	ND	ND
Potassium	mg/L	410 ^Q	1.6	1.3	1.8	0.9
pH	pH	6.5 – 8	7.6	7.3	7.8	7.3
Sodium	mg/L	NA	610	650	610	530
Ammonia	mg/L	0.9 ^D	0.04	0.04	0.04	0.07
Nitrate	mg/L	0.7	ND	ND	ND	ND
Sulfate	mg/L	NA	110	120	130	110
Total Organic Carbon (TOC)	mg/L	4	16	16	13	20
Total phenolics	mg/L	0.32	ND	0.01	ND	ND
EC	µS/c	NA	3100	3600	3500	3200

Samples highlighted in **Bold** exceed threshold criteria

ND = No Detection above Laboratory LOR

D – Trigger value may not protect key species from chronic toxicity, refer to ANZECC & ARMCANZ (2000) for further guidance

E - Interim working level, in absence of reliable trigger value

F - Trigger value for DDT used in absence of trigger value for total OCP

Q – Poor (acceptable) drinking water criteria, World Health Organisation Guidelines for Drinking-water Quality 2009

NA – Not Applicable

5.0 DISCUSSION

Due to the sites topography, the inferred hydraulic gradient is generally to the west. Wells MWA, MWB and MWC are located down-hydraulic gradient of the landfill. Well MWE is considered to be up-hydraulic gradient of the landfill. Well MWD is located within the perched landfill water table, being the leachate within the landfill.

The water sampled from well MWD is landfill leachate and as such the Threshold Criteria is not used as a comparison, only as an indicator of current conditions. MWD is to be used as a general indicator of water quality within the landfill for comparison to the external monitoring wells.

The following is a summary of the results of the April 2017 sampling event in relation to the Threshold Criteria. The following exceedances of the Threshold Criteria occurred.

- MWC exceeded the Manganese Threshold Criteria (1.9 mg/L) with a concentration of 7.3 mg/L. This is a slight decrease from the January 2017 concentration of 7.8 mg/L, overall there is an increasing trend over the past 12 months. An exceedance of 7.3 mg/L was detected for manganese in MWE (upgradient well), however MWD The leachate well had a minor detect of manganese that was under the threshold criteria, providing no indication that the Manganese is sourced from the landfill. Due to the exceedance in the up gradient well (MWE) it is likely that The Manganese may be migrating onto the site through the local ground water.
- Nitrate in MWB exceeded the Threshold Criteria (0.7 mg/L) with a concentration of 0.71 mg/L. This is the lowest exceedance observed in this well over the past 12 months. Exceedances of nitrate have been consistent in MWB since October 2016. There was no detection for Nitrate in MWD the leachate well, giving no indication that the Nitrate in the affected wells is sourced from the landfill. The Nitrate may be migrating onto the site from the farmland to the north through the local ground water.
- Exceedances of the Threshold Criteria (4 mg/L) for TOC occurred in all wells MWA, MWB, MWC, MWD and MWE. MWA exceeded the Threshold Criteria with a TOC reading of 6.4 mg/L, increasing from the January 2017 reading of 3.9 mg/L. MWB increased to 6.8 mg/L from the January 2017 sampling event of 5 mg/L. MWC has exceeded the Threshold criteria (4 mg/L) consistently since October 2015 with the reading being 23 mg/L. MWE has exceeded the Threshold criteria consistently since October 2015 and has increased slightly from 13 mg/L in January 2017 to 20 mg/L for the April sample event. The Threshold Criteria used for TOC is intended for drinking water, not groundwater. Due to the magnitude of the

exceedances and the intention of the Threshold Criteria used, these exceedances are regarded as minor. The TOC concentration in MWE indicates that TOC is likely to be elevated in the local groundwater.

The following changes and detections occurred in the landfill leachate well MWD;

- Ammonia concentration has decreased to 210 mg/L from the January 2017 concentration of 250 mg/L and has consistently been substantially higher than in the surrounding wells;
- Iron concentration has decreased to 0.92 mg/L, a minor detect from the January 2017 concentration of 1.1 mg/L.
- TOC concentration has decreased to 150 mg/L from the January 2017 sampling event (270 mg/L).

All other analytes in all other wells reported detections which were within the Threshold Criteria.

Refer to **Attachment 3** – Data Log

The data will be viewed on a trending basis as more results become available.

6.0 CONCLUSIONS

The results of laboratory analysis of the samples collected from the Scone Waste Landfill during the April 2017 quarterly sampling event confirmed several exceedances of the Threshold Criteria in the wells external to the landfill. The Threshold Criteria are sourced from the ANZECC 2000 Guidelines for Fresh Water 95% level of protection, NEPM 2013 and Australian Drinking Water Guidelines 2011.

The following analytes exceeded the Threshold Criteria during the April 2017 sampling event; Manganese in MWC and MWE, Nitrate in MWB, TOC in MWA, MWB, MWC and MWE. There were no other exceedances of the Threshold Criteria in the wells surrounding the landfill.

Some exceedances have been explained by local conditions or regarded as minor due to the criteria being Australian Drinking Water Guidelines. Trending of these analytes over time may indicate a seasonal fluctuation of regional groundwater conditions. All remaining exceedances are in MWD which is the leachate monitoring well. Exceeding concentrations in MWD are substantially higher than other wells, this indicates that it is unlikely that releases of landfill leachate into the local groundwater are occurring.


The elevated concentrations of Manganese, Nitrate, TOC in the landfill external wells does not indicate the concentrations are due to the landfill leachate, future testing and trending of data will allow for appropriate comparisons. Further monitoring may reveal the source and extent of elevated concentrations of particular analytes. As more data becomes available, it will become clearer which analytes are consistently elevated and may allow for determining the source of contamination.

The next water sampling event will be the annual monitoring which will be undertaken in July 2017.

7.0 REFERENCES


- *Australian and New Zealand Guidelines for the Management of Contaminated Sites* (ANZECC/NHMRC 1992);
- *Australia and New Zealand Guidelines for Fresh and Marine Water Quality* (ANZECC, 2000);
- *Australian Drinking Water Guidelines, National Water Quality Management Strategy 2011*;
- Chapman, G A, Murphy, C L, Tille, P J, Atkinson, G and Morse, R J, *Sydney Soil Landscapes Map, Series 9130* (1989);
- *Contaminated Land Management Act 1997* (NSW);
- *Contaminated Sites: Guidelines for Consultants Reporting on Contaminated Sites* (NSW EPA 2011);
- *Contaminated Sites: Guidelines on Duty to Report Contamination under the Contamination Land Management Act 1997* (NSW DECC, 2009);
- *Contaminated Sites: Guidelines for the Assessment and Management of Groundwater Contamination* (NSW DEC, 2007);
- *Contaminated Sites: Guidelines on Significant Risk of Harm from Contaminated Land and the Duty to Report* (NSW EPA 1999);
- *Contaminated Sites: Sampling Design Guidelines* (NSW EPA 1995);
- *Environmental Guidelines: Solid Waste Landfills* (NSW EPA, 1996);
- *Health - Based Soil Investigation Levels, Imray, P & Langley, A, National Environmental Health Forum Monographs, Soil Series No. 2 (2nd Ed), South Australian Health Commission* (NEHF 1998b);
- *National Environment Protection (Assessment of Site Contamination) Measure (No.1)* (NEPC, 2013);
- *Storage and Handling of Dangerous Goods Code of Practice 2005*;
- Pacific Southwest, Region 9 Regional Screening Levels (US EPA, 2014);
- *Work Health and Safety Act 2011* (NSW) and associated regulations.
- R.W. Young *and others*, Ferruginous weathering under cool temperate climates during the Late Pleistocene in southeastern Australia, *Zeitschrift fur Geomorphologie*, 38(1), 1994,
- *Quality Criteria for Water*, U.S. Environmental Protection Agency, July 1976.
- *Potassium in Drinking-water Background document for development of WHO Guidelines for Drinking-water Quality*, World Health Organization, 2009
- *Ambient Water Quality Guidelines for Organic Carbon*, Ministry of Environment, Lands and Parks, British Columbia, Canada 2001

FIGURE 1 – SITE LOCATION REGIONAL

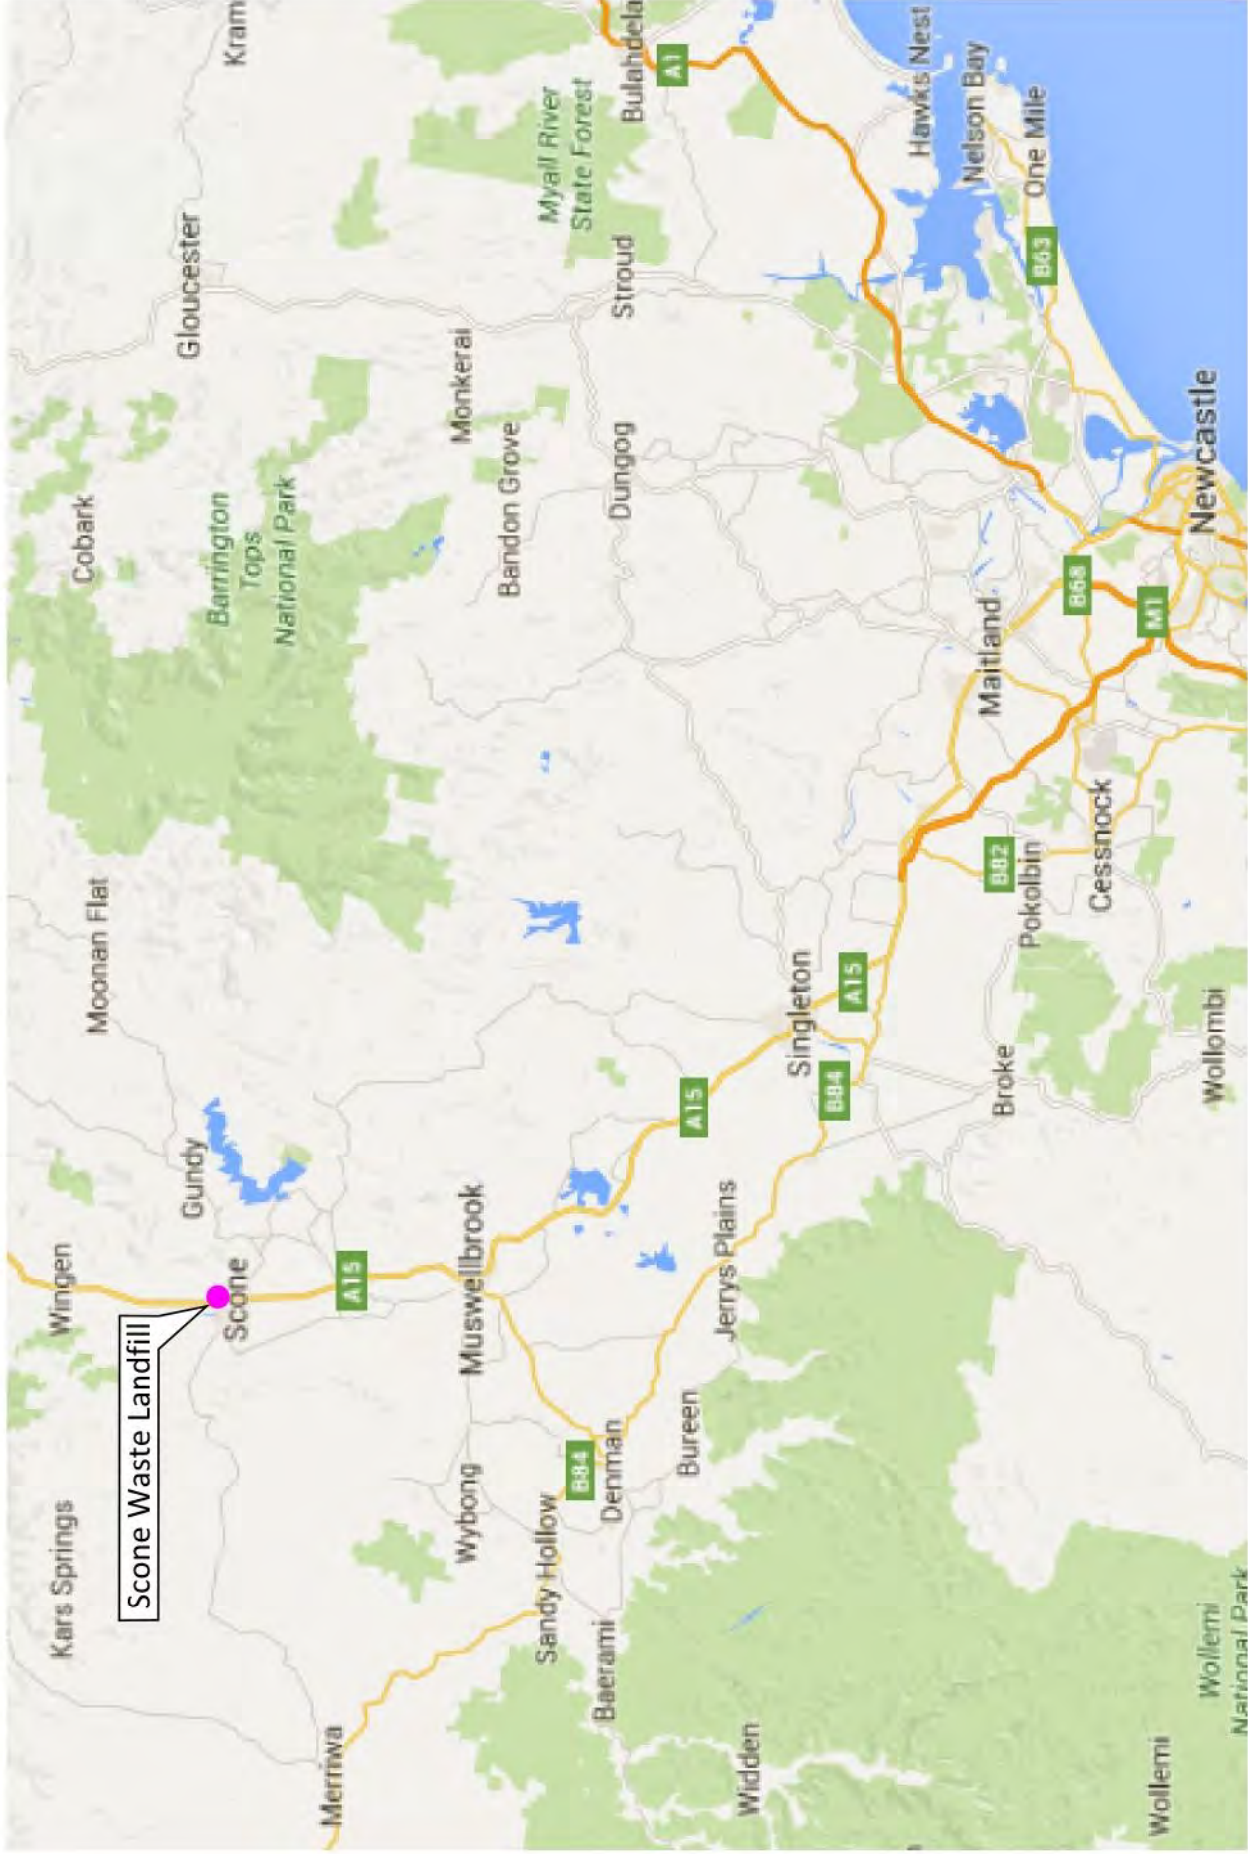

Scone Waste Landfill

Legend
● Site location - Noblet Rd, Scone




DLA Environmental Services
 A Public Environment Company

Sydney Office
 Phone (02) 9476 1765
 Fax (02) 9476 1557

Maitland Office
 Phone (02) 4933 0001

Title Site location regional	
Client Upper Hunter Shire Council	Project No. DLH1186
Figure No. 1	Date 3/11/2015
Scale As Shown	Completed BF
	Revision R01


FIGURE 2 – SITE LOCATION LOCAL

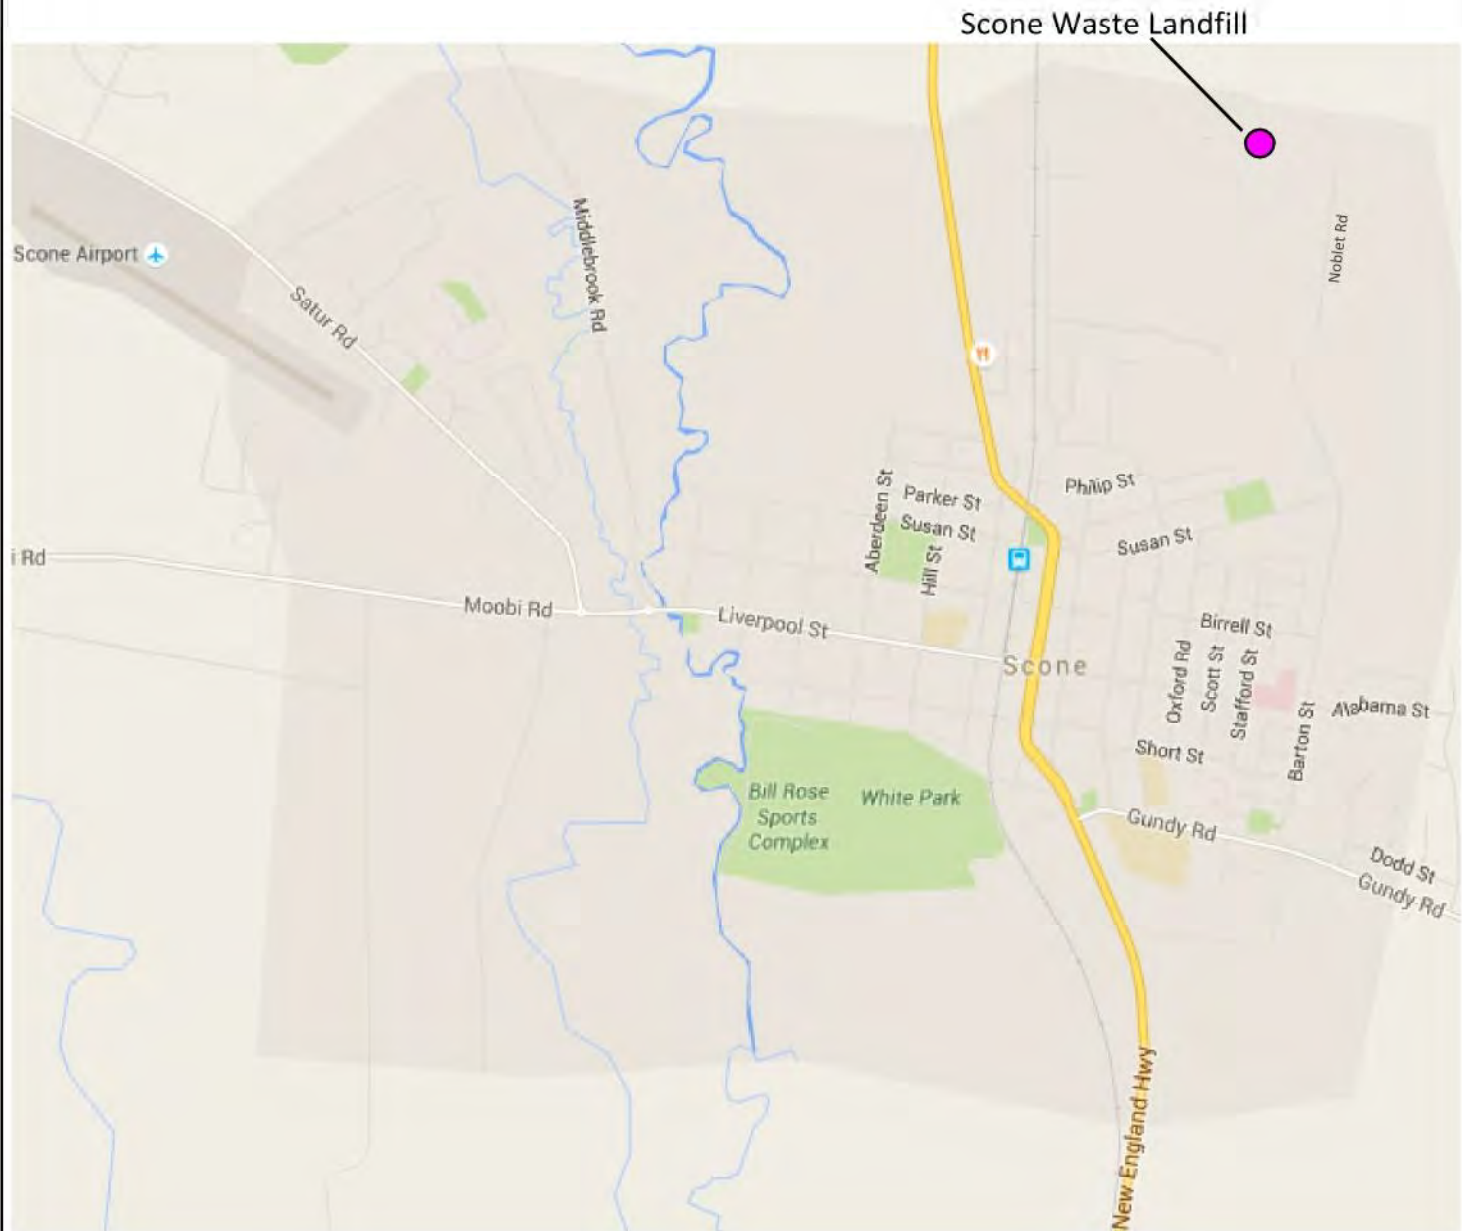

Legend

● Site Location - Noblet Rd, Scone

Approximate Scale




Sydney Office Phone (02) 9476 1765 Fax (02) 9476 1557
 Maitland Office Phone (02) 4933 0001

Title
Site location local


Client Upper Hunter Shire Council	Figure No 2	Date 3/11/2015
Project No. DLH1186	Scale As Shown	Compiled BF
		Revision R01

FIGURE 3 - SITE LAYOUT WITH SAMPLE LOCATIONS

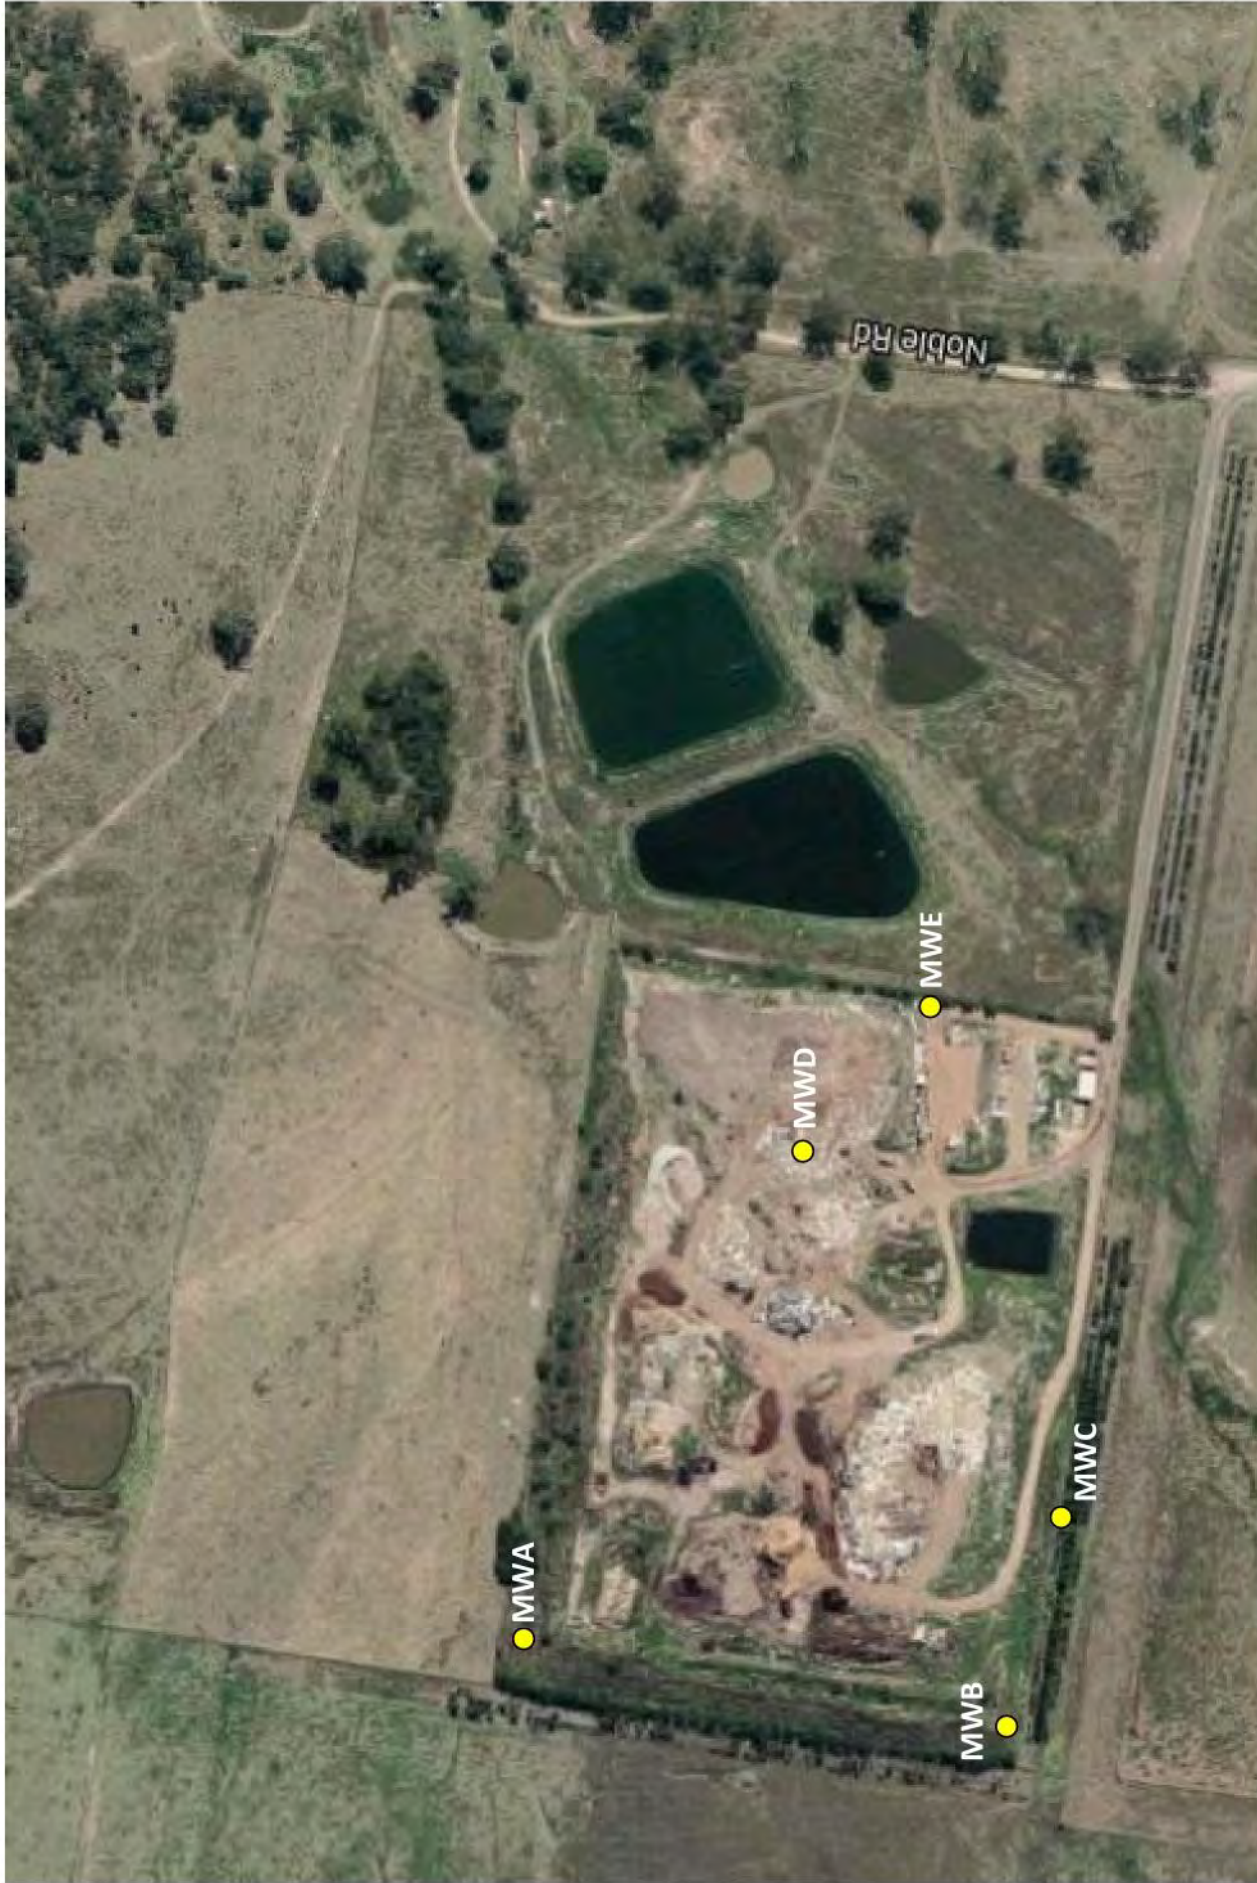

Legend

- Groundwater well location



DLA
DLA Environmental Services
A Public Environment Company

Sydney Office
Phone (02) 9476 1765
Fax (02) 9476 1557

Maitland Office
Phone (02) 4933 0001

Title Site layout with sample locations
Client Upper Hunter Shire Council

Project No. DLH1186
Scale As Shown

Figure No. 3
Completed BF

Date 16/10/2015
Revision R01

ATTACHMENT 1 – NATA CERTIFIED ANALYTICAL RESULTS

CLIENT DETAILS

LABORATORY DETAILS

Contact Stephen Challinor
 Client DLA ENVIRONMENTAL SERVICES PTY LTD
 Address 42b Church St
 Maitland
 NSW 2320

Telephone 61 2 4933 0001
 Facsimile 61 2 98700999
 Email stephen.challinor@dlaenvironmental.com.au

Project **DLH1186**
 Order Number (Not specified)
 Samples 5

Manager Huong Crawford
 Laboratory SGS Alexandria Environmental
 Address Unit 16, 33 Maddox St
 Alexandria NSW 2015

Telephone +61 2 8594 0400
 Facsimile +61 2 8594 0499
 Email au.environmental.sydney@sgs.com

SGS Reference **SE164082 R0**
 Date Received 11/4/2017
 Date Reported 19/4/2017


COMMENTS

Accredited for compliance with ISO/IEC 17025-Testing. NATA accredited laboratory 2562(4354).
 Ion Chromatography - The Limit of Reporting (LOR) has been raised for Nitrate-Nitrogen due to high conductivity of the sample requiring dilution.

SIGNATORIES



Bennet Lo
 Senior Organic Chemist/Metals Chemist



Dong Liang
 Metals/Inorganics Team Leader



Kamrul Ahsan
 Senior Chemist



Ly Kim Ha
 Organic Section Head

OC Pesticides in Water [AN420] Tested: 11/4/2017

PARAMETER	UOM	LOR	MWA	MWB	MWC	MWD	MWE
			WATER	WATER	WATER	WATER	WATER
			6/4/2017 SE164082.001	6/4/2017 SE164082.002	6/4/2017 SE164082.003	6/4/2017 SE164082.004	6/4/2017 SE164082.005
Hexachlorobenzene (HCB)	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Alpha BHC	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Lindane (gamma BHC)	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Heptachlor	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Aldrin	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Beta BHC	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Delta BHC	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Heptachlor epoxide	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
o,p'-DDE	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Alpha Endosulfan	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Gamma Chlordane	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Alpha Chlordane	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
trans-Nonachlor	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
p,p'-DDE	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Dieldrin	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Endrin	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
o,p'-DDD	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
o,p'-DDT	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Beta Endosulfan	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
p,p'-DDD	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
p,p'-DDT	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Endosulfan sulphate	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Endrin aldehyde	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Methoxychlor	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Endrin ketone	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Isodrin	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1
Mirex	µg/L	0.1	<0.1	<0.1	<0.1	<0.1	<0.1

Total Phenolics in Water [AN289] Tested: 13/4/2017

PARAMETER	UOM	LOR	MWA	MWB	MWC	MWD	MWE
			WATER - 6/4/2017 SE164082.001	WATER - 6/4/2017 SE164082.002	WATER - 6/4/2017 SE164082.003	WATER - 6/4/2017 SE164082.004	WATER - 6/4/2017 SE164082.005
Total Phenols	mg/L	0.01	0.16	0.02	<0.01	0.19	<0.01

Forms of Carbon [AN190] Tested: 12/4/2017

PARAMETER	UOM	LOR	MWA	MWB	MWC	MWD	MWE
			WATER - 6/4/2017 SE164082.001	WATER - 6/4/2017 SE164082.002	WATER - 6/4/2017 SE164082.003	WATER - 6/4/2017 SE164082.004	WATER - 6/4/2017 SE164082.005
Total Organic Carbon as NPOC	mg/L	0.2	6.4	6.8	23	150	20

Ammonia Nitrogen by Discrete Analyser (Aquakem) [AN291] Tested: 12/4/2017

PARAMETER	UOM	LOR	MWA	MWB	MWC	MWD	MWE
			WATER - 6/4/2017 SE164082.001	WATER - 6/4/2017 SE164082.002	WATER - 6/4/2017 SE164082.003	WATER - 6/4/2017 SE164082.004	WATER - 6/4/2017 SE164082.005
Ammonia Nitrogen, NH ₃ as N	mg/L	0.01	0.14	0.09	0.06	210	0.07

Anions by Ion Chromatography in Water [AN245] Tested: 12/4/2017

PARAMETER	UOM	LOR	MWA	MWB	MWC	MWD	MWE
			WATER - 6/4/2017 SE164082.001	WATER - 6/4/2017 SE164082.002	WATER - 6/4/2017 SE164082.003	WATER - 6/4/2017 SE164082.004	WATER - 6/4/2017 SE164082.005
Fluoride	mg/L	0.1	0.14	0.27	0.44	0.28	0.52
Chloride	mg/L	1	7700	6000	520	2200	360
Sulphate, SO4	mg/L	1	39	77	120	310	110
Nitrate Nitrogen, NO3-N	mg/L	0.005	0.24	0.71	<0.005	<0.025 †	<0.005

pH in water [AN101] Tested: 12/4/2017

PARAMETER	UOM	LOR	MWA	MWB	MWC	MWD	MWE
			WATER - 6/4/2017 SE164082.001	WATER - 6/4/2017 SE164082.002	WATER - 6/4/2017 SE164082.003	WATER - 6/4/2017 SE164082.004	WATER - 6/4/2017 SE164082.005
pH**	No unit	-	6.8	6.6	7.1	7.3	7.3

Conductivity and TDS by Calculation - Water [AN106] Tested: 12/4/2017

PARAMETER	UOM	LOR	MWA	MWB	MWC	MWD	MWE
			WATER - 6/4/2017 SE164082.001	WATER - 6/4/2017 SE164082.002	WATER - 6/4/2017 SE164082.003	WATER - 6/4/2017 SE164082.004	WATER - 6/4/2017 SE164082.005
Conductivity @ 25 C	µS/cm	2	21000	17000	2900	9400	3200
Total Dissolved Solids (by calculation)	mg/L	2	12000	10000	1700	5600	1900

Alkalinity [AN135] Tested: 11/4/2017

PARAMETER	UOM	LOR	MWA	MWB	MWC	MWD	MWE
			WATER - 6/4/2017 SE164082.001	WATER - 6/4/2017 SE164082.002	WATER - 6/4/2017 SE164082.003	WATER - 6/4/2017 SE164082.004	WATER - 6/4/2017 SE164082.005
Bicarbonate Alkalinity as CaCO ₃	mg/L	5	450	360	670	1500	1100
Carbonate Alkalinity as CaCO ₃	mg/L	1	<1	<1	<1	<1	<1
Hydroxide Alkalinity as CaCO ₃	mg/L	5	<5	<5	<5	<5	<5
Phenolphthalein Alkalinity as CaCO ₃ *	mg/L	5	<5	<5	<5	<5	<5
Total Alkalinity as CaCO ₃	mg/L	5	450	360	670	1500	1100

Acidity and Free CO2 [AN140] Tested: 12/4/2017

PARAMETER	UOM	LOR	MWA	MWB	MWC	MWD	MWE
			WATER 6/4/2017 SE164082.001	WATER 6/4/2017 SE164082.002	WATER 6/4/2017 SE164082.003	WATER 6/4/2017 SE164082.004	WATER 6/4/2017 SE164082.005
Acidity to pH 8.3	mg CaCO3/L	5	220	150	100	280	100

Metals in Water (Dissolved) by ICPOES [AN320/AN321] Tested: 12/4/2017

PARAMETER	UOM	LOR	MWA	MWB	MWC	MWD	MWE
			WATER	WATER	WATER	WATER	WATER
			6/4/2017	6/4/2017	6/4/2017	6/4/2017	6/4/2017
			SE164082.001	SE164082.002	SE164082.003	SE164082.004	SE164082.005
Calcium, Ca	mg/L	0.1	570	580	34	260	34
Magnesium, Mg	mg/L	0.1	1100	760	68	190	67
Sodium, Na	mg/L	0.1	2200	1700	540	1200	530
Potassium, K	mg/L	0.2	3.1	2.8	0.9	130	0.9

Trace Metals (Dissolved) in Water by ICPMS [AN318] Tested: 12/4/2017

PARAMETER	UOM	LOR	MWA	MWB	MWC	MWD	MWE
			WATER - 6/4/2017 SE164082.001	WATER - 6/4/2017 SE164082.002	WATER - 6/4/2017 SE164082.003	WATER - 6/4/2017 SE164082.004	WATER - 6/4/2017 SE164082.005
Iron, Fe	µg/L	5	<5	<5	<5	920	6
Manganese, Mn	µg/L	1	6	9	7300	780	7300

METHOD

METHODOLOGY SUMMARY

- AN020** Unpreserved water sample is filtered through a 0.45µm membrane filter and acidified with nitric acid similar to APHA3030B.
- AN101** pH in Soil Sludge Sediment and Water: pH is measured electrometrically using a combination electrode (glass plus reference electrode) and is calibrated against 3 buffers purchased commercially. For soils, an extract with water is made at a ratio of 1:5 and the pH determined and reported on the extract. Reference APHA 4500-H+.
- AN106** Conductivity and TDS by Calculation: Conductivity is measured by meter with temperature compensation and is calibrated against a standard solution of potassium chloride. Conductivity is generally reported as µmhos/cm or µS/cm @ 25°C. For soils, an extract with water is made at a ratio of 1:5 and the EC determined and reported on the extract, or calculated back to the as-received sample. Total Dissolved Salts can be estimated from conductivity using a conversion factor, which for natural waters, is in the range 0.55 to 0.75. SGS use 0.6. Reference APHA 2510 B.
- AN135** Alkalinity (and forms of) by Titration: The sample is titrated with standard acid to pH 8.3 (P titre) and pH 4.5 (T titre) and permanent and/or total alkalinity calculated. The results are expressed as equivalents of calcium carbonate or recalculated as bicarbonate, carbonate and hydroxide. Reference APHA 2320. Internal Reference AN135
- AN140** Acidity by Titration: The water sample is titrated with sodium hydroxide to designated pH end point. In a sample containing only carbon dioxide, bicarbonates and carbonates, titration to pH 8.3 at 25°C corresponds to stoichiometric neutralisation of carbonic acid to bicarbonate. Method reference APHA 2310 B.
- AN190** TOC and DOC in Water: A homogenised micro portion of sample is injected into a heated reaction chamber packed with an oxidative catalyst that converts organic carbon to carbon dioxide. The CO₂ is measured using a non-dispersive infrared detector. The process is fully automated in a commercially available analyser. If required a sugar value can be calculated from the TOC result. Reference APHA 5310 B.
- AN190** Chemical oxygen demand can be calculated/estimated based on the O₂/C relation as 2.67*NPOC (TOC). This is an estimate only and the factor will vary with sample matrix so results should be interpreted with caution.
- AN245** Anions by Ion Chromatography: A water sample is injected into an eluent stream that passes through the ion chromatographic system where the anions of interest ie Br, Cl, NO₂, NO₃ and SO₄ are separated on their relative affinities for the active sites on the column packing material. Changes to the conductivity and the UV-visible absorbance of the eluent enable identification and quantitation of the anions based on their retention time and peak height or area. APHA 4110 B
- AN289** Analysis of Total Phenols in Soil Sediment and Water: Steam distillable phenols react with 4-aminoantipyrine at pH 7.9±0.1 in the presence of potassium ferricyanide to form a coloured antipyrine dye analysed by Discrete Analyser. Reference APHA 5530 B/D.
- AN291** Ammonia in solution reacts with hypochlorite ions from Sodium Dichloroisocyanate, and salicylate in the presence of Sodium Nitroprusside to form indophenol blue and measured at 670 nm by Discrete Analyser.
- AN318** Determination of elements at trace level in waters by ICP-MS technique, in accordance with USEPA 6020A.
- AN320/AN321** Metals by ICP-OES: Samples are preserved with 10% nitric acid for a wide range of metals and some non-metals. This solution is measured by Inductively Coupled Plasma. Solutions are aspirated into an argon plasma at 8000-10000K and emit characteristic energy or light as a result of electron transitions through unique energy levels. The emitted light is focused onto a diffraction grating where it is separated into components .
- AN320/AN321** Photomultipliers or CCDs are used to measure the light intensity at specific wavelengths. This intensity is directly proportional to concentration. Corrections are required to compensate for spectral overlap between elements . Reference APHA 3120 B.
- AN420** SVOC Compounds: Semi-Volatile Organic Compounds (SVOCs) including OC, OP, PCB, Herbicides, PAH, Phthalates and Speciated Phenols in soils, sediments and waters are determined by GCMS/ECD technique following appropriate solvent extraction process (Based on USEPA 3500C and 8270D).
- Calculation** Free and Total Carbon Dioxide may be calculated using alkalinity forms only when the samples TDS is <500mg/L. If TDS is >500mg/L free or total carbon dioxide cannot be reported . APHA4500CO₂ D.

FOOTNOTES

*	NATA accreditation does not cover the performance of this service.	-	Not analysed.	UOM	Unit of Measure.
**	Indicative data, theoretical holding time exceeded.	NVL	Not validated.	LOR	Limit of Reporting.
		IS	Insufficient sample for analysis.	↑↓	Raised/lowered Limit of Reporting.
		LNR	Sample listed, but not received.		

Samples analysed as received.
Solid samples expressed on a dry weight basis.

Where "Total" analyte groups are reported (for example, Total PAHs, Total OC Pesticides) the total will be calculated as the sum of the individual analytes, with those analytes that are reported as <LOR being assumed to be zero. The summed (Total) limit of reporting is calculated by summing the individual analyte LORs and dividing by two. For example, where 16 individual analytes are being summed and each has an LOR of 0.1 mg/kg, the "Totals" LOR will be 1.6 / 2 (0.8 mg/kg). Where only 2 analytes are being summed, the "Total" LOR will be the sum of those two LORs.

Some totals may not appear to add up because the total is rounded after adding up the raw values.

If reported, measurement uncertainty follow the ± sign after the analytical result and is expressed as the expanded uncertainty calculated using a coverage factor of 2, providing a level of confidence of approximately 95%, unless stated otherwise in the comments section of this report.

Results reported for samples tested under test methods with codes starting with ARS-SOP, radionuclide or gross radioactivity concentrations are expressed in becquerel (Bq) per unit of mass or volume or per wipe as stated on the report. Becquerel is the SI unit for activity and equals one nuclear transformation per second.

Note that in terms of units of radioactivity:

- a. 1 Bq is equivalent to 27 pCi
- b. 37 MBq is equivalent to 1 mCi

For results reported for samples tested under test methods with codes starting with ARS-SOP, less than (<) values indicate the detection limit for each radionuclide or parameter for the measurement system used. The respective detection limits have been calculated in accordance with ISO 11929.

The QC criteria are subject to internal review according to the SGS QAQC plan and may be provided on request or alternatively can be found here : <http://www.sgs.com.au/~media/Local/Australia/Documents/Technical%20Documents/MP-AU-ENV-QU-022%20QA%20QC%20Plan.pdf>

This document is issued by the Company under its General Conditions of Service accessible at www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client only. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law .

This report must not be reproduced, except in full.

ATTACHMENT 2 – YSI WATER QUALITY METER CALIBRATION CERTIFICATE

Multi Parameter Water Meter

Instrument YSI Pro DSS
Serial No. 15J100066




Air-Met Scientific Pty Ltd
1300 137 067

Item	Test	Pass	Comments
Battery	Charge Condition	✓	
	Fuses	✓	
	Capacity	✓	
	Recharge OK?	✓	
Switch/keypad	Operation	✓	
Display	Intensity	✓	
	Operation (segments)	✓	
Grill Filter	Condition	✓	
	Seal	✓	
PCB	Condition	✓	
Connectors	Condition	✓	
Sensor	1. pH/ORP	✓	
	2. Turbidity	✓	Not calibrated
	3. Conductivity	✓	
	4. D.O	✓	
	5. Temp	✓	
	6. Depth	✓	
Alarms	Beeper		
	Settings		
Software	Version		
Data logger	Operation		
Download	Operation		
Other tests:			

Certificate of Calibration

This is to certify that the above instrument has been calibrated to the following specifications:

Sensor	Serial no	Standard Solutions	Certified	Solution Bottle Number	Instrument Reading
1. EC		2.76mS		290786	2.76mS
2. Temp		21.5°C		Testo	21.2°C
3. pH 4		pH 4.00		288994	pH 4.16
4. pH 7		pH 7.00		288773	pH 6.78
5. pH 10		pH 10.00		291176	pH 9.25
6. DO		0.00ppm		4347	0.00ppm
7. mV		231.8mV		OB1388/OB1390	231.7mV

Calibrated by:  Joanna Wong

Calibration date: 5/04/2017

Next calibration due: 2/10/2017

ATTACHMENT 3 – DATA LOG

ATTACHMENT 4 – GROUNDWATER FIELD DATA SHEETS

GROUNDWATER FIELD DATA SHEET

DLA Project Code: DLH1186	Sample ID:
Project: The Scone Waste Landfill	Well Collar RL:
Client: Upper Hunter Shire Council	Sampler(s): T.S
Address: Noblet Rd, Scone NSW 2289	Signature:
BH ID: MAAS A	Date: 6/4/2017

Well Status

Monument damaged:	YES <input type="checkbox"/> NO <input checked="" type="checkbox"/> N/A	Well ID visible:	YES <input type="checkbox"/> NO <input checked="" type="checkbox"/> N/A
Locked well casing:	YES <input type="checkbox"/> NO <input checked="" type="checkbox"/> N/A	Cap on PVC casing:	YES <input type="checkbox"/> NO <input checked="" type="checkbox"/> N/A
Cement footing damaged:	YES <input type="checkbox"/> NO <input checked="" type="checkbox"/> N/A	Water in monument casing:	YES <input type="checkbox"/> NO <input checked="" type="checkbox"/> N/A
Standing water, vegetation around monument:	YES <input type="checkbox"/> NO <input checked="" type="checkbox"/> N/A	Internal obstruction in casing:	YES <input type="checkbox"/> NO <input checked="" type="checkbox"/> N/A
Well Damaged:	YES <input type="checkbox"/> NO <input checked="" type="checkbox"/> N/A	Odours from groundwater:	YES <input type="checkbox"/> NO <input checked="" type="checkbox"/> N/A
Nearby works:			
Comments: <u>Clear water</u>			
Casing above ground:		Weather Conditions:	
Standing water level: <u>604 mm</u>	m agl	Temperature	15-20 <input checked="" type="checkbox"/> 20-25 <input type="checkbox"/>
Total well depth: <u>15.7</u>	m bgl		25-30 <input type="checkbox"/> >30 <input type="checkbox"/>
Initial well volume: <u>18.9</u>	L	Clear <input type="checkbox"/>	Partly cloudy <input checked="" type="checkbox"/> Overcast <input type="checkbox"/>
Water level after purging:	m bgl	Calm <input type="checkbox"/>	Slight breeze <input checked="" type="checkbox"/> Moderate breeze <input type="checkbox"/>
Volume of water purged: <u>15 L</u>	L	Windy <input type="checkbox"/>	
Water level at time of sampling:	m bgl	Fine <input type="checkbox"/>	Showers <input checked="" type="checkbox"/> Rain <input type="checkbox"/>
Well purged dry:	YES <input type="checkbox"/> NO <input checked="" type="checkbox"/>		
Purging equipment: <u>Bailer</u>			
Sample equipment: <u>Bailer</u>			

Note: 50mm internal diameter pipe = 1.96 L/m. All measurements below well collar

Water Quality Details:

Time am/pm	DO (mg/L ⁻¹)	EC (µS cm ⁻²)	pH	Redox (mV)	Temp (°C)	Salinity (% Refract)	Comments
0126	~0.22	20478	7.48	164.8	21.7	13.15%	> 13.15%
0128	~0.24	20468	6.92	159.2	21.8		> 13.12 %
0129	2~0.24	20474	6.77	158.3	21.9	13.16%	> 13.16 %

Additional Comments:

GROUNDWATER FIELD DATA SHEET

DLA Project Code: DLH1186	Sample ID:
Project: The Scone Waste Landfill	Well Collar RL:
Client: Upper Hunter Shire Council	Sampler(s): T-S ₁
Address: Noblet Rd, Scone NSW 2289	Signature:
BH ID: MWB MWE	Date: 1/4/17

Well Status

Monument damaged:	YES <input checked="" type="radio"/> NO <input checked="" type="radio"/> N/A	Well ID visible:	YES <input checked="" type="radio"/> NO <input checked="" type="radio"/> N/A
Locked well casing:	YES <input checked="" type="radio"/> NO <input checked="" type="radio"/> N/A	Cap on PVC casing:	YES <input checked="" type="radio"/> NO <input checked="" type="radio"/> N/A
Cement footing damaged:	YES <input checked="" type="radio"/> NO <input checked="" type="radio"/> N/A	Water in monument casing:	YES <input checked="" type="radio"/> NO <input checked="" type="radio"/> N/A
Standing water, vegetation around monument:	YES <input checked="" type="radio"/> NO <input checked="" type="radio"/> N/A	Internal obstruction in casing:	YES <input checked="" type="radio"/> NO <input checked="" type="radio"/> N/A
Well Damaged:	YES <input checked="" type="radio"/> NO <input checked="" type="radio"/> N/A	Odours from groundwater:	YES <input checked="" type="radio"/> NO <input checked="" type="radio"/> N/A
Nearby works:		

Comments: *Clear*

Casing above ground:	m agl	Weather Conditions:			
Standing water level: <i>2.97</i>	m bgl	Temperature	15-20 <input checked="" type="checkbox"/>	20-25 <input type="checkbox"/>	
Total well depth: <i>9.50</i>	m bgl		25-30 <input type="checkbox"/>	>30 <input type="checkbox"/>	
Initial well volume: <i>13.53</i>	L	Clear <input type="checkbox"/>	Partly cloudy <input checked="" type="checkbox"/>	Overcast <input type="checkbox"/>	
Water level after purging:	m bgl	Calm <input type="checkbox"/>	Slight breeze <input checked="" type="checkbox"/>	Moderate breeze <input type="checkbox"/>	
Volume of water purged: <i>40</i>	L	Windy <input type="checkbox"/>			
Water level at time of sampling:	m bgl	Fine <input type="checkbox"/>	Showers <input checked="" type="checkbox"/>	Rain <input type="checkbox"/>	
Well purged dry:	YES <input checked="" type="radio"/> NO <input type="radio"/>				
Purging equipment: <i>Peristaltic pump</i>					
Sample equipment: <i>Peristaltic pumps</i>					

Note: 50mm internal diameter pipe = 1.96 L/m. All measurements below well collar

Water Quality Details:

Time am / pm	DO (mg/L ⁻¹)	EC (µS cm ⁻²)	pH	Redox (mV)	Temp (°C)	Salinity (% Refract)	Comments
0315	-0.29	3141	8.09	-36.9	19.8	1.83	→ 1.83 %
0318	-0.29	3141	7.69	-44.5	19.8		→ 1.83 %
0320	-0.29	3141	7.51	-50.2	19.9		→ 1.83 %
0322	-0.29	3142	7.50	-53.4	19.9		→ 1.83 %

Additional Comments:

GROUNDWATER FIELD DATA SHEET

DLA Project Code: DLH1186	Sample ID:
Project: The Scone Waste Landfill	Well Collar RL:
Client: Upper Hunter Shire Council	Sampler(s): <i>SS</i>
Address: Noblet Rd, Scone NSW 2289	Signature:
BH ID: MWB MWB	Date: 6/9/12

Well Status

Monument damaged:	YES <input type="radio"/> NO <input checked="" type="radio"/> N/A	Well ID visible:	YES <input checked="" type="radio"/> NO <input type="radio"/> N/A
Locked well casing:	YES <input type="radio"/> NO <input checked="" type="radio"/> N/A	Cap on PVC casing:	YES <input type="radio"/> NO <input checked="" type="radio"/> N/A
Cement footing damaged:	YES <input type="radio"/> NO <input checked="" type="radio"/> N/A	Water in monument casing:	YES <input type="radio"/> NO <input checked="" type="radio"/> N/A
Standing water, vegetation around monument:	YES <input type="radio"/> NO <input checked="" type="radio"/> N/A	Internal obstruction in casing:	YES <input type="radio"/> NO <input checked="" type="radio"/> N/A
Well Damaged:	YES <input type="radio"/> NO <input checked="" type="radio"/> N/A	Odours from groundwater:	YES <input type="radio"/> NO <input checked="" type="radio"/> N/A
Nearby works:			
Comments: <i>Vegetation around monument clear, no odour</i>			
Casing above ground: <i>5cm</i>	magl	Weather Conditions:	
Standing water level: <i>6.3</i>	magl	Temperature	15-20 <input checked="" type="checkbox"/> 20-25 <input type="checkbox"/>
Total well depth: <i>16</i>	magl		25-30 <input type="checkbox"/> >30 <input type="checkbox"/>
Initial well volume: <i>19L</i>	L	Clear <input type="checkbox"/>	Partly cloudy <input checked="" type="checkbox"/> Overcast <input type="checkbox"/>
Water level after purging:	magl	Calm <input type="checkbox"/>	Slight breeze <input checked="" type="checkbox"/> Moderate breeze <input type="checkbox"/>
Volume of water purged: <i>16L</i>	L	Windy <input type="checkbox"/>	
Water level at time of sampling:	magl	Fine <input type="checkbox"/>	Showers <input checked="" type="checkbox"/> Rain <input type="checkbox"/>
Well purged dry:	YES <input type="radio"/> NO <input checked="" type="radio"/>		
Purging equipment: <i>Bailer</i>			
Sample equipment: <i>Bailer</i>			

Note: 50mm internal diameter pipe = 1.96 L/m. All measurements below well collar

Water Quality Details:

Time am / pm	DO (mg/L ⁻¹)	EC (µS cm ⁻¹)	pH	Redox (mV)	Temp (°C)	Salinity (% Refract)	Comments
<i>0155</i>	<i>0.27</i>	<i>16579</i>	<i>7.38</i>	<i>141.3</i>	<i>20.6</i>	<i>10.73</i>	
<i>0155</i>	<i>0.27</i>	<i>16550</i>	<i>7.44</i>	<i>143.9</i>	<i>20.6</i>	<i>10.71</i>	
<i>0157</i>	<i>0.27</i>	<i>16545</i>	<i>7.02</i>	<i>141.5</i>	<i>20.6</i>	<i>10.70</i>	

Additional Comments:

MWC

GROUNDWATER FIELD DATA SHEET

DLA Project Code: DLH1186	Sample ID:
Project: The Scone Waste Landfill	Well Collar RL:
Client: Upper Hunter Shire Council	Sample #s: T.S
Address: Noblet, Scone NSW 2289	Signature: [Signature]
BH ID: MWC	Date: 6/2/17

Well Status

Locked well casing: YES <input checked="" type="checkbox"/> NO <input type="checkbox"/> N/A <input type="checkbox"/>	Well ID visible: YES <input checked="" type="checkbox"/> NO <input type="checkbox"/> N/A <input type="checkbox"/>
Cement footing damaged: YES <input checked="" type="checkbox"/> NO <input type="checkbox"/> N/A <input type="checkbox"/>	Cap on PVC casing: YES <input checked="" type="checkbox"/> NO <input type="checkbox"/> N/A <input type="checkbox"/>
Standing water, <u>vegetation</u> around monument: YES <input checked="" type="checkbox"/> NO <input type="checkbox"/> N/A <input type="checkbox"/>	Water in monument casing: YES <input checked="" type="checkbox"/> NO <input type="checkbox"/> N/A <input type="checkbox"/>
Well Damaged: YES <input checked="" type="checkbox"/> NO <input type="checkbox"/> N/A <input type="checkbox"/>	Internal obstruction in casing: YES <input checked="" type="checkbox"/> NO <input type="checkbox"/> N/A <input type="checkbox"/>
Nearby works: <u>Vegetation around monument</u>	Odours from groundwater: YES <input checked="" type="checkbox"/> NO <input type="checkbox"/> N/A <input type="checkbox"/>

Comments: Suggest slashing around cw well clear, no odours

Casing above ground: _____ m agl	Weather Conditions:
Standing water level: <u>4.27</u> m bgl	Temperature 15-20 <input checked="" type="checkbox"/> 20-25 <input type="checkbox"/>
Total well depth: <u>12.66</u> m bgl	25-30 <input type="checkbox"/> >30 <input type="checkbox"/>
Initial well volume: <u>8.59</u> L	Clear <input type="checkbox"/> <u>Partly cloudy</u> <input checked="" type="checkbox"/> Overcast <input type="checkbox"/>
Water level after purging: _____ m bgl	Calm <input type="checkbox"/> <u>Slight breeze</u> <input checked="" type="checkbox"/> Moderate breeze <input type="checkbox"/>
Volume of water purged: <u>6L</u> L	Windy <input type="checkbox"/>
Water level at time of sampling: _____ m bgl	Fine <input type="checkbox"/> <u>Showers</u> <input checked="" type="checkbox"/> Rain <input type="checkbox"/>
Well purged dry: YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>	
Purging equipment: <u>Bailer</u>	
Sample equipment: <u>Bailer</u>	

Note: 50mm internal diameter pipe = 1.96 L/m. All measurements below well collar

Water Quality Details:

(- 45 cm)

Time am/pm	DO (mg/L ⁻³)	EC (µS cm ⁻¹)	pH	Redox (mV)	Temp (°C)	Salinity (% Refract)	Comments
01:34	-0.30	3147	7.87	-118.5	20.6	1.80% → 1.80%	
01:35	-0.29	3127	7.51	-123.9	20.6	1.79% → 1.79%	
01:37	-0.29	3119	7.36	-122.3	20.6	1.79% → 1.79%	
01:39	-0.29	3109	7.26	-121	20.7	1.78% → 1.78%	

Additional Comments:

GROUNDWATER FIELD DATA SHEET

DLA Project Code: DLH1186	Sample ID:
Project: The Scone Waste Landfill	Well Collar RL:
Client: Upper Hunter Shire Council	Sampler(s): T-3
Address: Noblet Rd, Scone NSW 2289	Signature:
BH ID: MWD	Date: 6/11/17

Well Status

Monument damaged: YES/NO/N/A	Well ID visible: YES/NO/N/A
Locked well casing: YES/NO/N/A	Cap on PVC casing: YES/NO/N/A
Cement footing damaged: YES/NO/N/A	Water in monument casing: YES/NO/N/A
Standing water, vegetation around monument: YES/NO/N/A	Internal obstruction in casing: YES/NO/N/A
Well Damaged: YES/NO/N/A	Odours from groundwater: YES/NO/N/A
Nearby works: well has been knocked over before	
Comments: JAN 2017 Sample event: well casing has snapped at base of monument but is still able to be capped & is operational. Suggest repairs are needed to lengthen well & install new monument & footing	
Casing above ground: 0.015 m m agl	Weather Conditions:
Standing water level: m bgl	Temperature 15-20 <input checked="" type="checkbox"/> 20-25 <input type="checkbox"/>
Total well depth: m bgl	25-30 <input type="checkbox"/> >30 <input type="checkbox"/>
Initial well volume: L	Clear <input type="checkbox"/> Partly cloudy <input checked="" type="checkbox"/> Overcast <input type="checkbox"/>
Water level after purging: m bgl	Calm <input type="checkbox"/> Slight breeze <input checked="" type="checkbox"/> Moderate breeze <input type="checkbox"/>
Volume of water purged: L	Windy <input type="checkbox"/>
Water level at time of sampling: m bgl	Fine <input type="checkbox"/> Showers <input checked="" type="checkbox"/> Rain <input type="checkbox"/>
Well purged dry: YES/NO	
Purging equipment: LECHATE WELL	
Sample equipment: NOT SAMPLED WITH YSI	

Note: 50mm internal diameter pipe = 1.96 L/m. All measurements below well collar

Water Quality Details:

Time am / pm	DO (mg/L ⁻¹)	EC (μS cm ⁻¹)	pH	Redox (mV)	Temp (°C)	Salinity (% Refract)	Comments
LECHATE WELL NOT SAMPLED WITH YSI							

Additional Comments: